

INOXPA RF FLEXIBLE IMPELLER PUMP WITH CART

Overview

The Inoxpa RF is a flexible impeller pump. Due to the design, these pumps are reversible, self-priming and can suck from a maximum height of 16 feet. This type of pump is designed to pump products of both low and high viscosities at a low or high volume.

Key Features

- Excellent value
- Transfer case ensures reversible capability
- Self-priming
- Easy maintenance
- External single mechanical seal
- Pumps products of both low and high viscosity




MODEL	MAX FLOW RATE (GPM)	MAX PRESSURE	CONNECTIONS
RF 05/25 w/cart & VFD	5-15 GPM	58 PSI (4 BAR)	1" TC
RF 10/40 w/cart & VFD	5-35 GPM	58 PSI (4 BAR)	1.5" TC
RF 20/50 w/cart & VFD	5-80 GPM	58 PSI (4 BAR)	2" TC

Pump and motor without cart and VFD pricing is available.

Equipment Details

- All contact materials are 316L stainless steel
- Gaskets: Black NBR
- Mechanical seal:
 - Rotary part: Carbon (C)
 - Stationary part: Ceramic (Cer)
- Temperature range: up to 176°F
- Voltage: customer to specify
 - 3 phase / 60 hertz - 240v or 480v

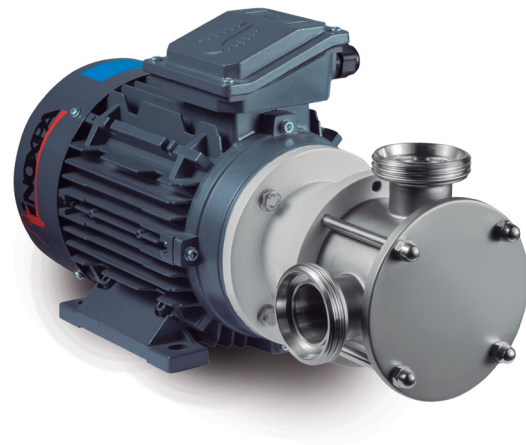

Last updated: 09/22/2022